


NCR CORPORATION P C 3 8 6

Processor	80386DX
Processor Speed	25MHz
Chip Set	NCR
Max. Onboard DRAM	8MB
Cache	64KB
BIOS	AMI
Dimensions	350mm x 304mm
I/O Options	32-bit external memory card slot
NPU Options	80387/3167

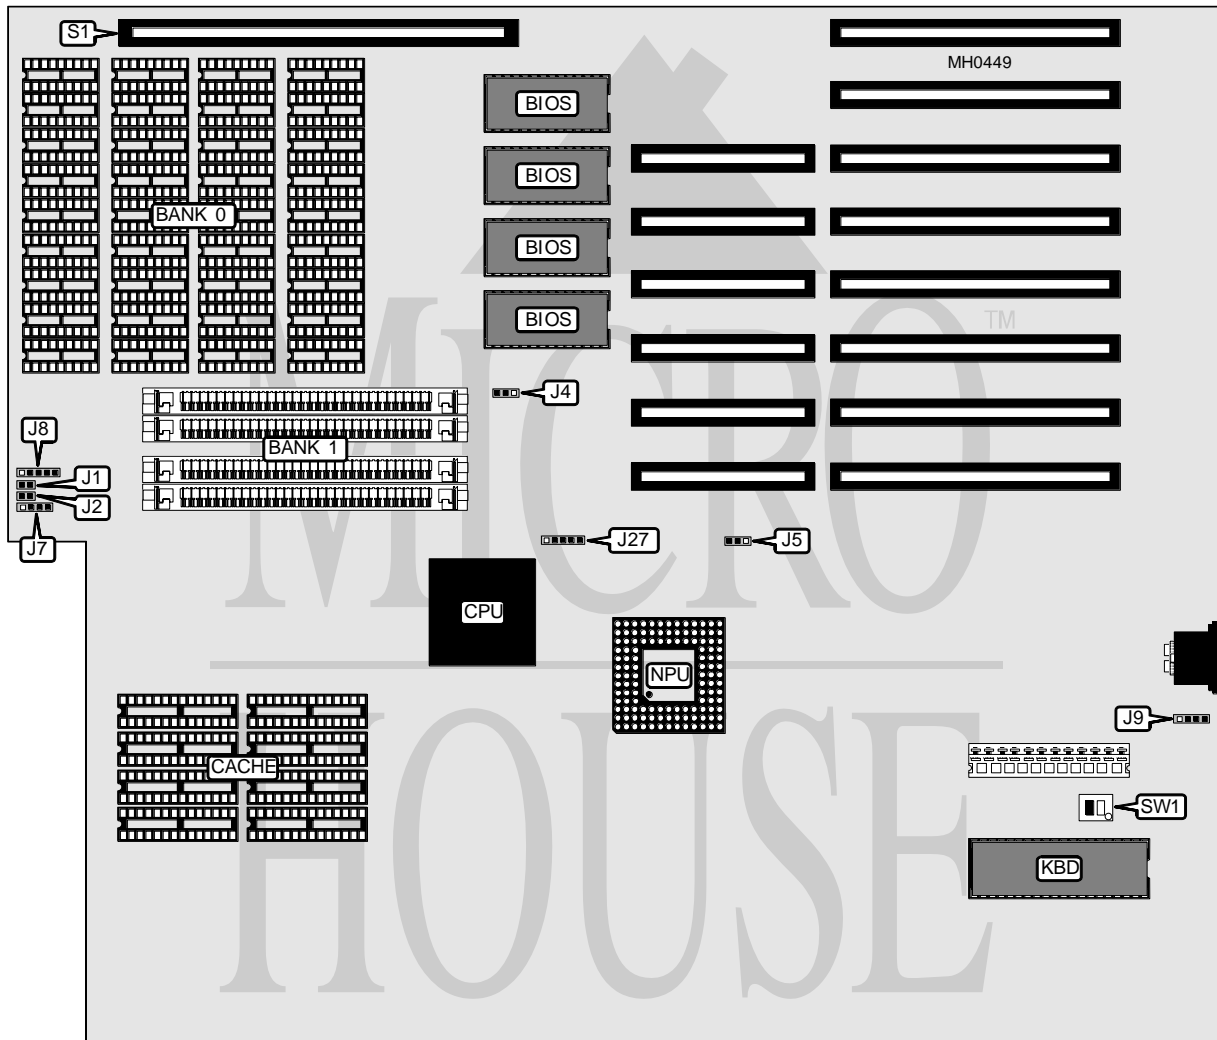

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	J1	Power LED & keylock	J8
Reset switch	J2	External battery	J9
Speaker	J7	32-bit external memory card	S1

Continued on next page . . .

NCR CORPORATION

PC386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í BIOS type select 27256	J4	pins 1 & 2 closed
BIOS type select 27128	J4	pins 2 & 3 closed
í NPU enabled	J5	pins 1 & 2 closed
NPU disabled	J5	pins 2 & 3 closed
í Factory configured - do not alter	SW1/1	Off
í Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(36) 411000	NONE
8MB	(36) 411000	(4) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	J27
4MB	pins 1 & 2, 3 & 4 closed
8MB	pins 2 & 3, 4 & 5 closed

CACHE CONFIGURATION	
Size	Bank 0
64KB	(8) 8K x 8