


# WYSE TECHNOLOGY, INC.

## WYSE DECISION 486/33T

<b>Processor</b>	80486DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	WYSE
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	128KB
<b>BIOS</b>	WYSE
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	4167

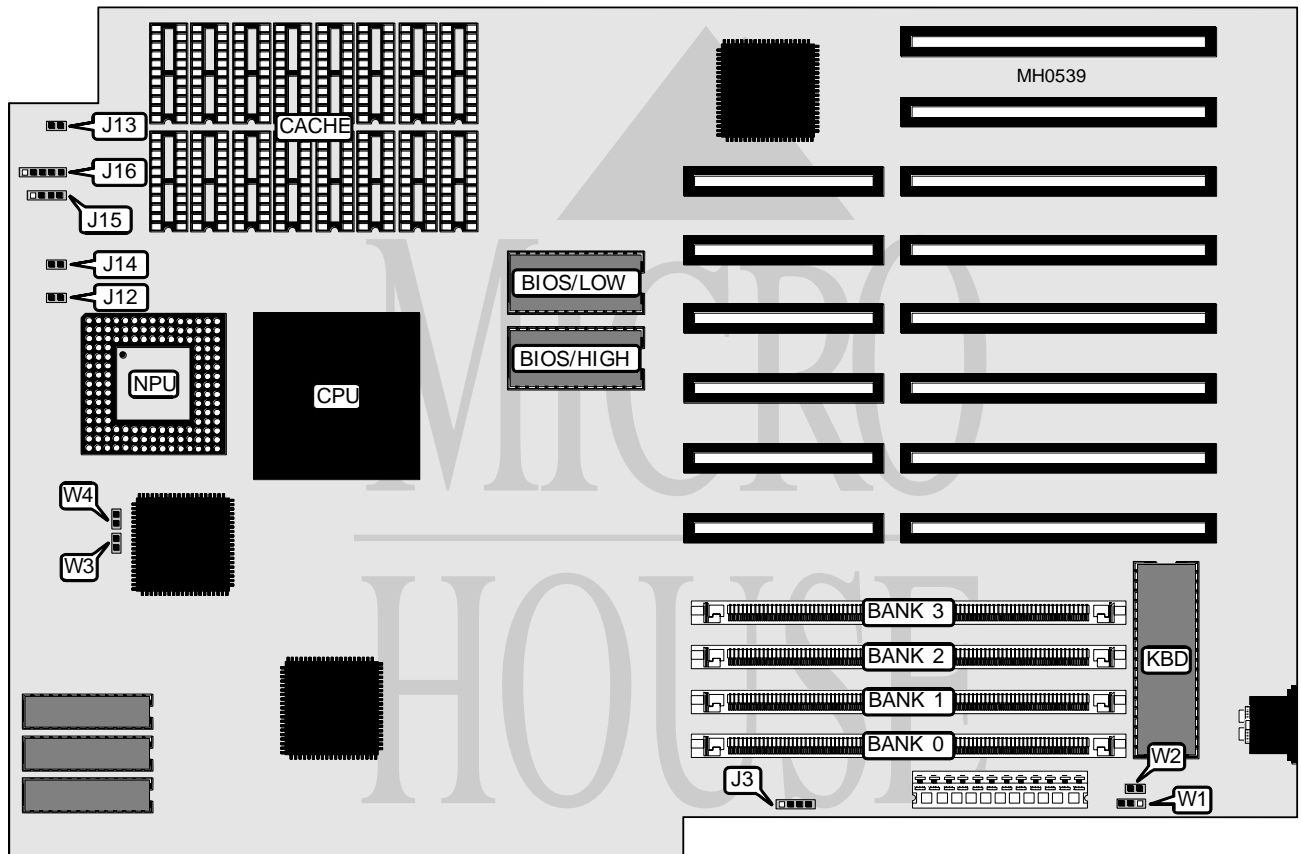

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Turbo LED	J14
Reset switch	J12	Speaker	J15
Turbo switch	J13	Power LED & keylock	J16

Continued on next page . . .

**WYSE TECHNOLOGY, INC.**  
**WYSE DECISION 486/33T**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	W1	pins 2 & 3 closed
Monitor type select monochrome	W1	pins 1 & 2 closed
í Factory test disabled	W2	Open
Factory test enabled	W2	Closed
í Factory configured - do not alter	W3	Open
í Factory configured - do not alter	W4	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	NONE
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE	NONE
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	NONE
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
9MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	NONE
10MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
13MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36

CACHE CONFIGURATION	
Size	Bank 0
128KB	(16) 64K x 1