JUKO LABORATORIES, LTD.


PRO Q 386DX

80386DX **Processor Processor Speed** 25/33MHz **Chip Set** OPTI Max. Onboard DRAM 8MB Cache 32/64KB **BIOS** AMI

Dimensions 330mm x 218mm

I/O Options 32-bit external memory card slot

NPU Options 80387/3167

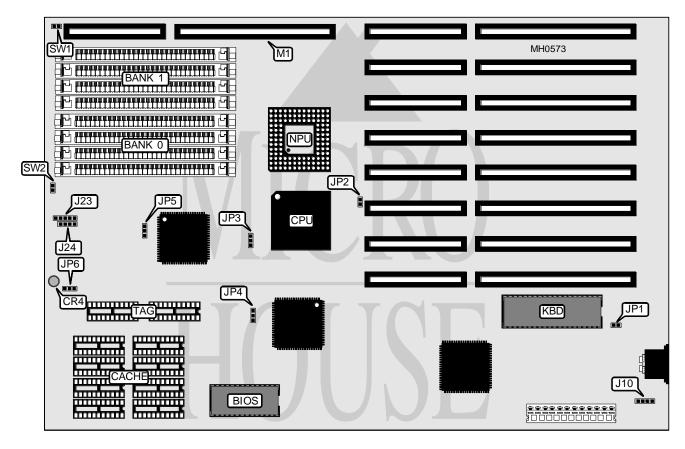

CONNECTIONS				
Purpose	Location	Purpose	Location	
Turbo LED	CR4	32-bit external memory card	M1	
External battery	J10	Reset switch	SW1	
Power LED & keylock	J23	Turbo switch	SW2	
Speaker	J24			

Continued on next page . . .

JUKO LABORATORIES, LTD. PRO Q 386DX

 $\dots continued \ from \ previous \ page$

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	JP1	Closed		
Monitor type select monochrome	JP1	Open		
í Pipeline mode disabled	JP2	Open		
Pipeline mode enabled	JP2	Closed		
í BIOS type select 27512	JP3	pins 1 & 2 closed		
BIOS type select 27256	JP3	pins 2 & 3 closed		

DRAM CONFIGURATION				
Size	Bank 0 Bank 1			
1MB	(4) 256K x 9	NONE		
2MB	(4) 256K x 9	(4) 256K x 9		
4MB	(4) 1M x 9	NONE		
8MB	(4) 1M x 9	(4) 1M x 9		

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG	
32KB	(4) 64K x 1	NONE	(2) 16K x 4	
64KB	(4) 64K x 1	(4) 64K x 1	(2) 16K x 4	

CACHE JUMPER CONFIGURATION					
Size	JP4	JP5	JP6		
32KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed		
64KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed		