
CACHE COMPUTERS, INC. CACHE 304

| Processor | 80386DX |
|-------------------|---------------|
| Processor Speed | 16/20MHz |
| Chip Set | Unidentified |
| Max. Onboard DRAM | 10MB |
| Cache | None |
| BIOS | Award |
| Dimensions | 355mm x 304mm |
| I/O Options | None |
| NPU Options | 80387 |

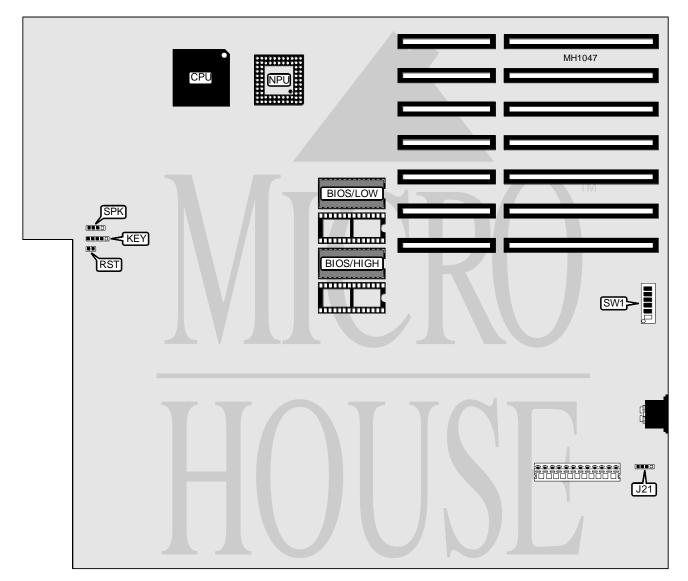

| CONNECTIONS | | | |
|---|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | J21 | Reset switch | RST |
| Power LED & keylock | KEY | Speaker | SPK |
| Note: The location of expansion slots and memory is unidentified. | | | |

Continued on next page . . .

Copyright © 1992, 1993, Micro House International (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

CACHE COMPUTERS, INC. CACHE 304

... continued from previous page

| USER CONFIGURABLE SETTINGS | | | |
|-------------------------------------|--------|----------|--|
| Function | Switch | Position | |
| í Factory configured - do not alter | SW1/1 | On | |
| í NPU disabled | SW1/2 | Off | |
| NPU enabled | SW1/2 | On | |
| í Factory configured - do not alter | SW1/3 | Off | |
| í Factory configured - do not alter | SW1/4 | Off | |
| í Factory configured - do not alter | SW1/5 | Off | |
| í Monitor type select color | SW1/6 | On | |
| Monitor type select monochrome | SW1/6 | Off | |