


**SOYO COMPUTER CO., LTD.**  
**SY - 015 G**

<b>Processor</b>	80386DX/CX486DLC
<b>Processor Speed</b>	25/33/40MHz
<b>Chip Set</b>	Micronics
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	8KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387/3167

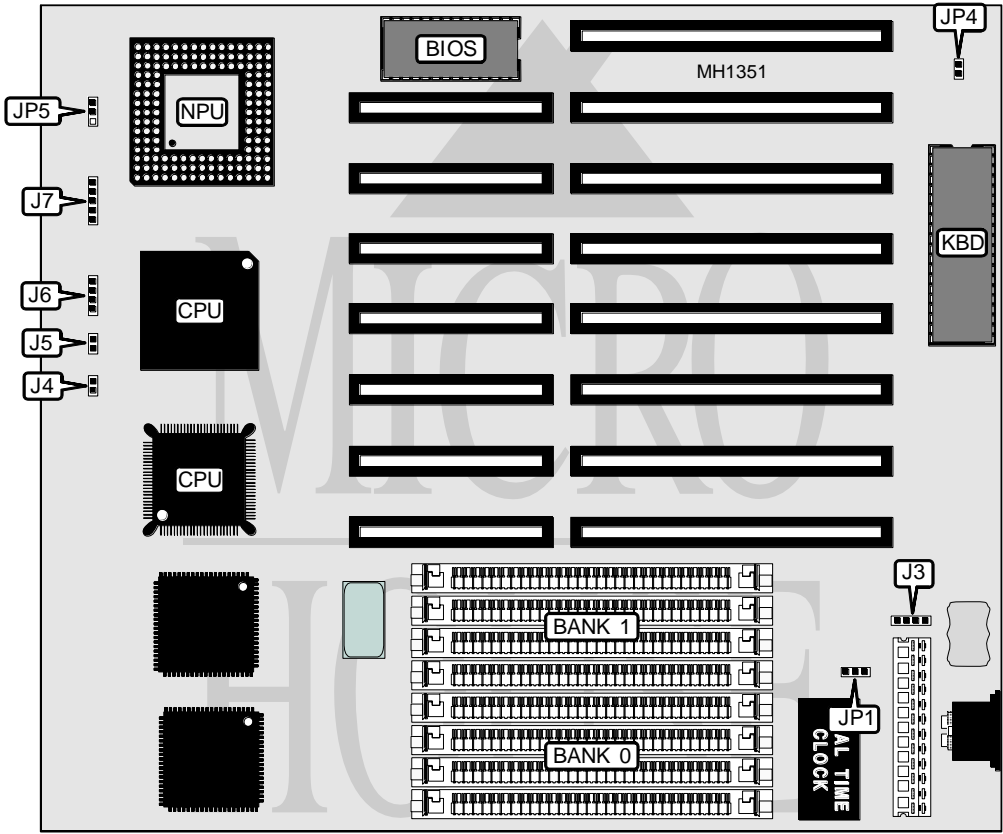

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Speaker	J6
Turbo switch	J4	Power LED & keylock	J7
Reset switch	J5		

Continued on next page . . .

## SOYO COMPUTER CO., LTD.

## SY-015G

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 1 & 2 closed
CMOS memory clear	JP1	pins 2 & 3 closed
í Monitor type select color	JP4	Closed
Monitor type select monochrome	JP4	Open
í CPU type select 80386DX	JP5	pins 1 & 2 closed
CPU type select CX486DLC	JP5	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9