


UNIDENTIFIED

386/32

Processor	80386DX
Processor Speed	16/20MHz
Chip Set	C & T
Max. onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80387DX

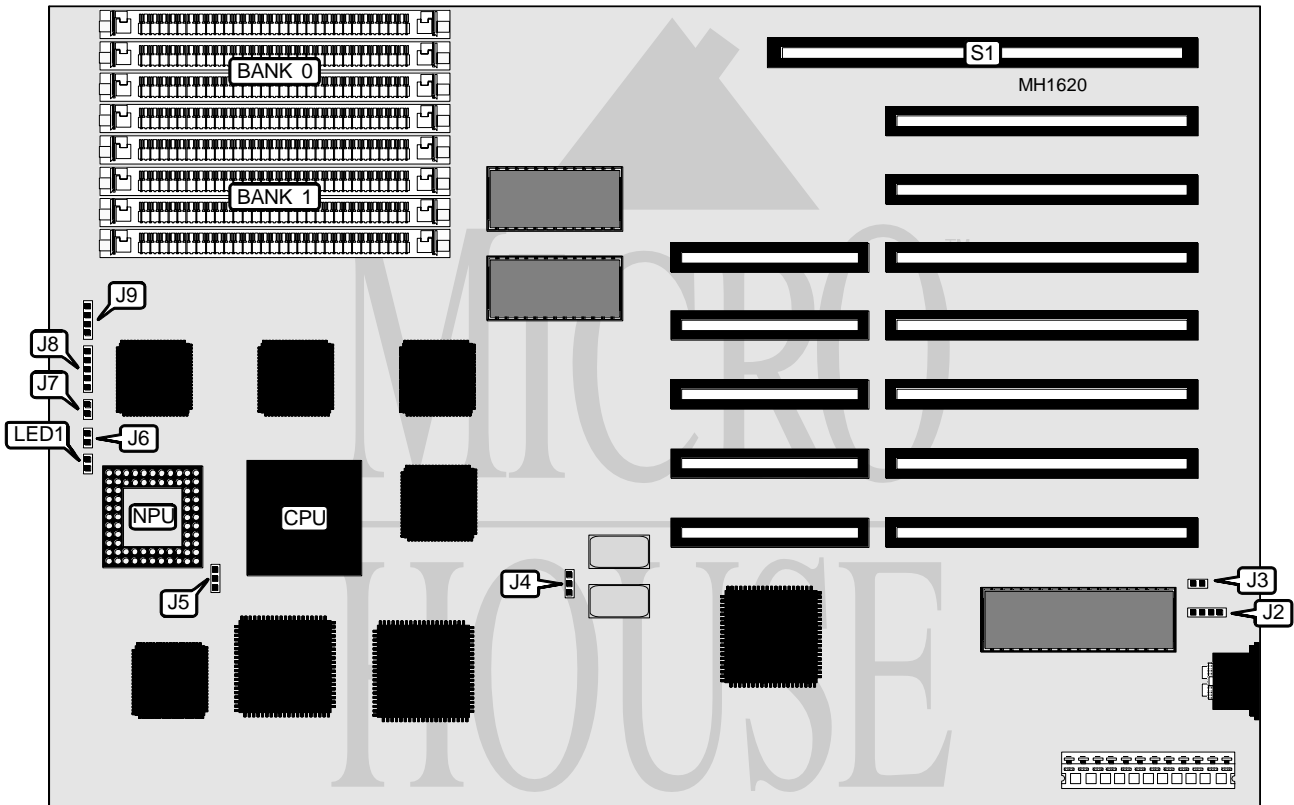

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Speaker	J9
Turbo switch	J6	Turbo LED	LED1
Reset switch	J7	32-bit external memory card	S1
Power LED & keylock	J8		

Continued on next page . . .

UNIDENTIFIED

386/32

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J3	Closed
Monitor type select color	J3	Open
í CPU speed select 16MHz	J4	pins 1 & 2 closed
CPU speed select 20MHz	J4	pins 2 & 3 closed
í NPU disabled	J5	pins 2 & 3 closed
NPU enabled	J5	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9