


UNIDENTIFIED 386 ISA

Processor	80386DX
Processor Speed	33/40MHz
Chip Set	Unidentified
Max. Onboard DRAM	32MB
Cache	32/128KB
BIOS	AMI
Dimensions	220mm x 218mm
I/O Options	None
NPU Options	80387DX

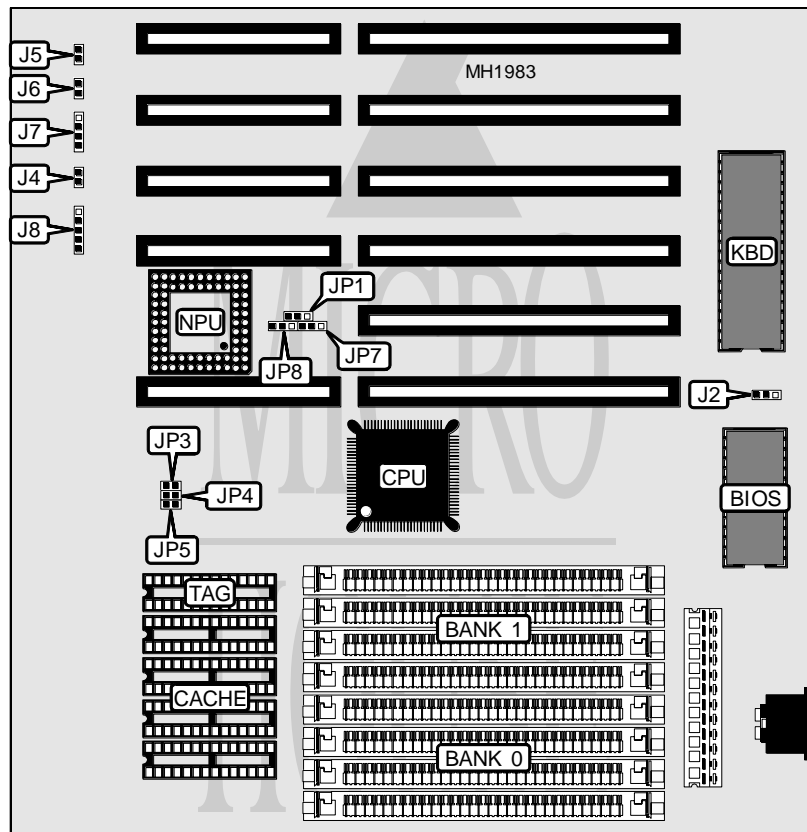

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo LED	J6
Reset switch	J4	Speaker	J7
Turbo switch	J5	Power LED & keylock	J8

Continued next page...

UNIDENTIFIED

386 ISA

... continued from previous page.

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
NPU disabled	JP1	pins 2 & 3 closed
NPU enabled	JP1	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION

Size	Bank 0	TAG
32KB	(4) 64K x 1	(1) 8K x 1
128KB	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION

Size	JP3	JP4	JP5
32KB	Open	Open	Open
128KB	Closed	Closed	Closed

CPU SPEED CONFIGURATION

Speed	JP7	JP8
33MHz	pins 2 & 3 closed	pins 1 & 2 closed
40MHz	pins 1 & 2 closed	pins 1 & 2 closed