


# UNIDENTIFIED

## AL386-33/40C (ALI)

Processor	80386DX/CX486DLC
Processor Speed	33/40MHz
Chip Set	ALI
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387DX/CX487DLC/3167

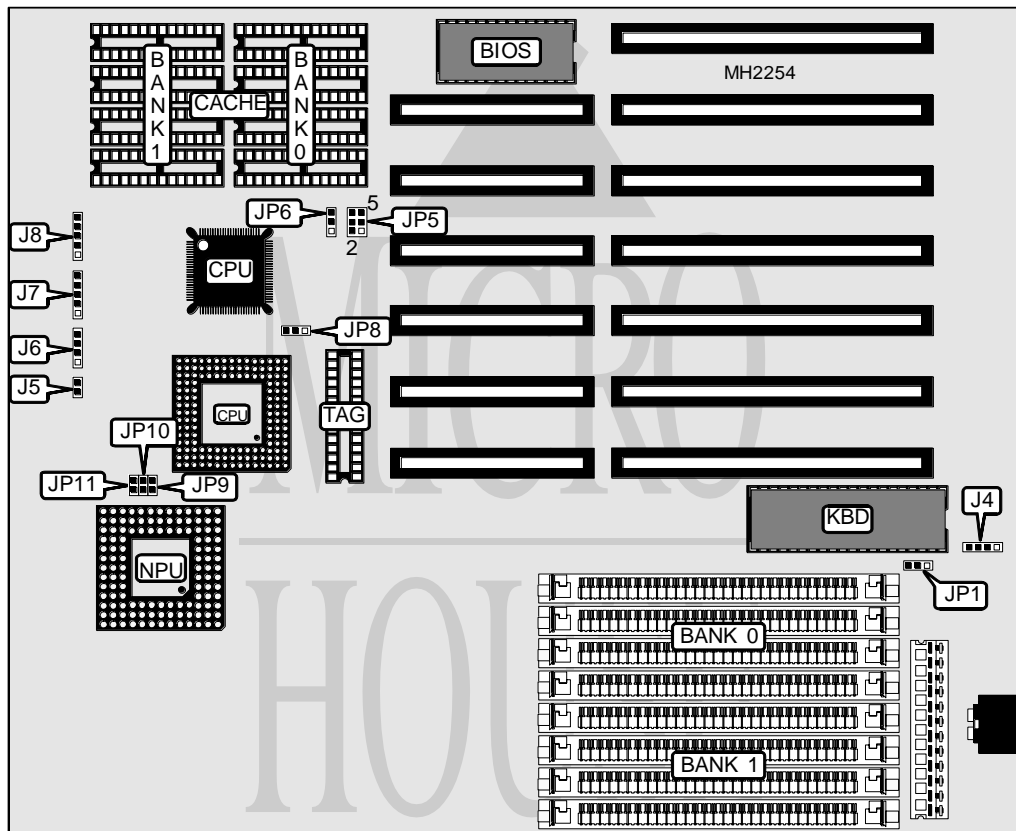

### CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J4	Turbo switch	J7 (pins 1 -2 closed)
Reset switch	J5	Turbo LED	J7 (pins 3 -5 closed)
Speaker	J6	Power LED & keylock	J8

Continued next page. . .

# UNIDENTIFIED

## AL386-33/40C (ALI)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	pins 1 & 2 closed
Monitor type select color	JP1	pins 2 & 3 closed
í Tag type select 8-bit	JP8	pins 2 & 3 closed
Tag type select 7-bit & dirty bit	JP8	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION		
Size	JP5	JP6
64KB	Open	pins 1 & 2 closed
128KB	pins 1 & 2, 3 & 4 closed	pins 2 & 3 closed
256KB	pins 1 & 2, 3 & 4, 5 & 6 closed	pins 1 & 2 closed

CPU TYPE CONFIGURATION			
Type	JP9	JP10	JP11
Intel	Open	Open	Open
Cyrix	Closed	Closed	Closed