


UNIDENTIFIED

386SX

Processor	80386SX
Processor Speed	16MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

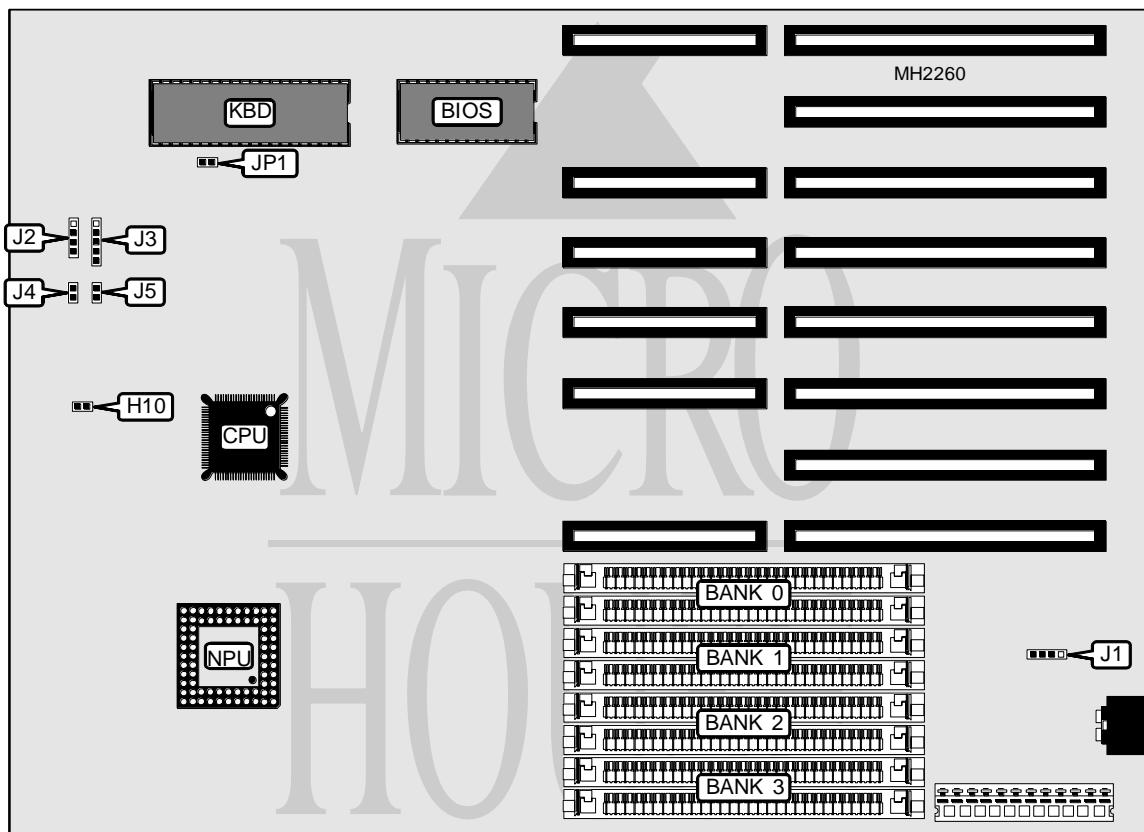

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	J4
Speaker	J2	Reset switch	J5
Power LED & keylock	J3		

Continued next page...

UNIDENTIFIED**386SX***... continued from previous page*

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	H10	Open
Monitor type select color	H10	Closed
í Pipeline mode enabled	JP1	Closed
Pipeline mode disabled	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 1M x 9	(2) 256K x 9	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
3.5MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
8.5MB	(2) 4M x 9	(2) 256K x 9	NONE	NONE
9MB	(2) 4M x 9	(2) 256K x 9	(2) 256K x 9	NONE
9.5MB	(2) 4M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
10MB	(2) 4M x 9	(2) 1M x 9	NONE	NONE
10.5MB	(2) 4M x 9	(2) 1M x 9	(2) 256K x 9	NONE
11MB	(2) 4M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
12MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	NONE
12.5MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
14MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE