
AQUARIUS SYSTEMS, INC. 486E/486C

Processor 80486	SX
Processor Speed 25/33	MHz
Chip Set Intel	
Max. Onboard DRAM 64MB	
Cache 64/128	8/256KB
BIOS Phoen	ix
Dimensions 355mr	n x 305mm
I/O Options None	
NPU Options 4167	

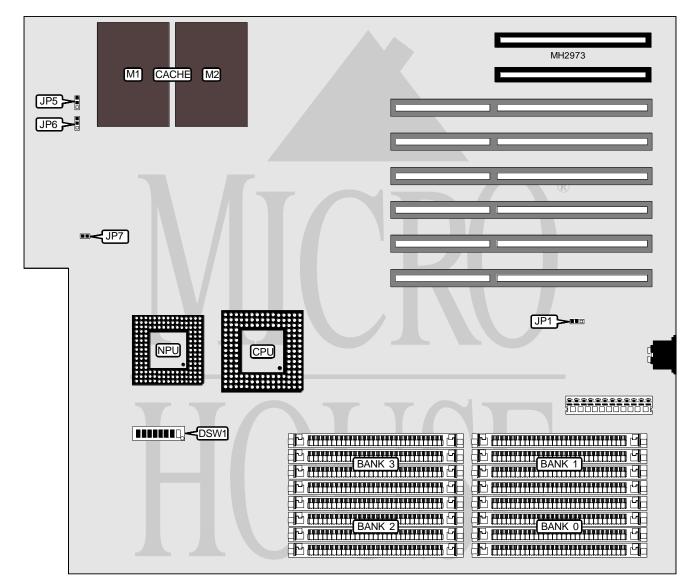

Continued on next page. . .

AQUARIUS SYSTEMS, INC. 486E/486C

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	JP1	pins 2 & 3 closed		
Monitor type select monochrome	JP1	pins 1 & 2 closed		
í Cache module not installed	JP6	pins 2 & 3 closed		
Cache module installed	JP6	pins 1 & 2 closed		

		DRAM CONFIGURATION	J	
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

DRAM SWITCH CONFIGURATION								
Size	DSW1/1	DSW1/2	DSW1/3	DSW1/4	DSW1/5	DSW1/6	DSW1/7	DSW1/8
1MB	On							
2MB	Off	On						
3MB	Off	Off	On	On	On	On	On	On
4MB	Off	Off	On	On	On	On	On	On
4MB	Off	Off	On	On	On	On	Off	On
8MB	Off	Off	Off	On	On	On	Off	On
12MB	Off	Off	Off	Off	On	On	Off	On
16MB	Off	Off	Off	Off	On	On	Off	On
16MB	Off	Off	Off	Off	On	On	Off	Off
32MB	Off	Off	Off	Off	Off	On	Off	Off
48MB	Off							
64MB	Off							

CACHE CONFIGURATION				
Size	M1	M2		
64KB	64KB module installed	NONE		
128KB	64KB module installed	64KB module installed		
128KB	128KB module installed	NONE		
256KB	128KB module installed	128KB module installed		

Continued on next page. . .

AQUARIUS SYSTEMS, INC. 486E/486C

... continued from previous page

CACHE JUMPER CONFIGURATION		
Size	JP5	
64КВ	pins 2 & 3 closed	
128KB	pins 1 & 2 closed	
256КВ	Open	

CPU SPEED CONFIGURATION		
Speed	JP7	
25MHz	Closed	
33MHz	Open	