


UNIDENTIFIED 386-25NC

Processor	80386SX
Processor Speed	25MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB (8MB on external memory card)
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	External memory card
NPU Options	80387SX/3167

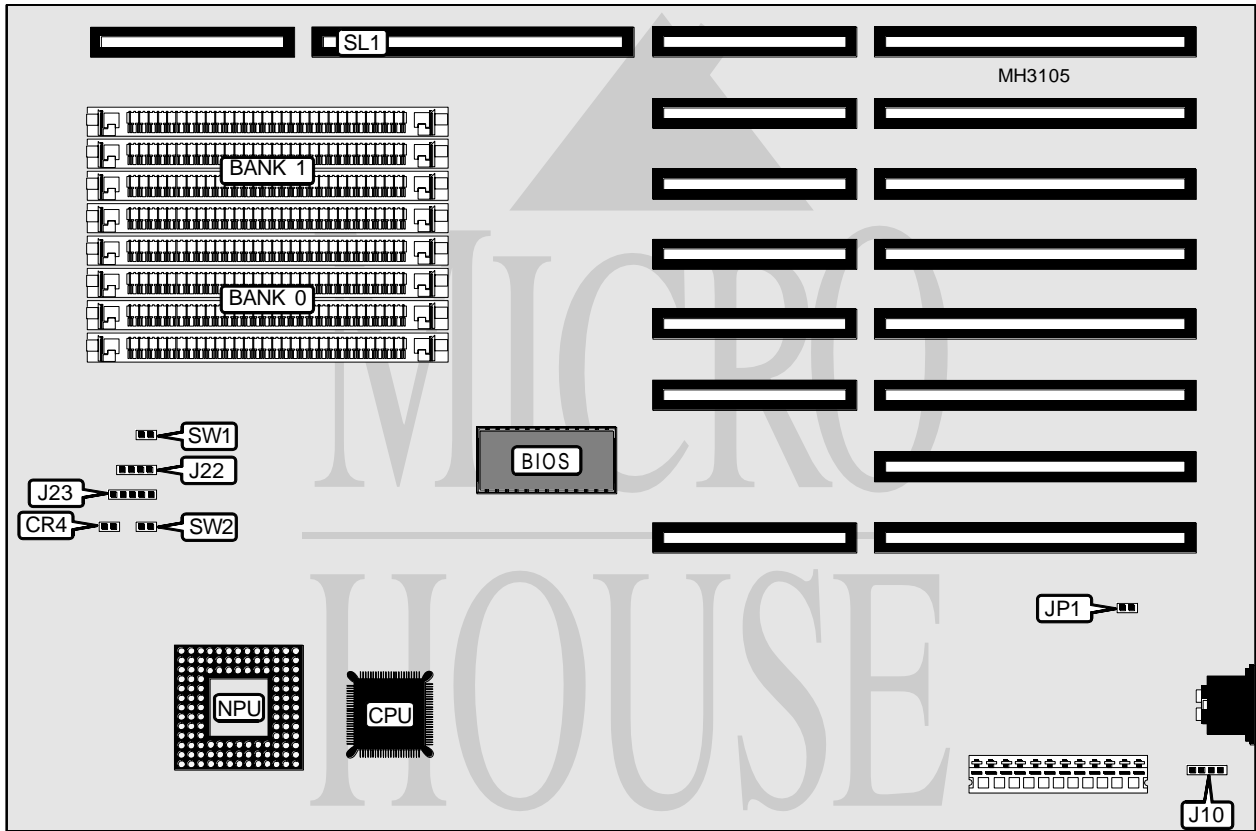

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR4	Reset switch	SW1
External battery	J10	Turbo switch	SW2
Speaker	J22	External memory card	SL1
Power LED & keylock	J23		
Note: The location of pin 1 is unidentified.			

Continued on next page. . .

UNIDENTIFIED

386-25NC

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

Note: Banks 2 & 3 are on the external memory card.