


WYSE TECHNOLOGY, INC.

WYSE SERIES 7000I MODEL 740MP

Processor	80386DX
Processor Speed	33MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	512MB (on external memory cards)
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	External memory card, CPU/memory card slots (3), keyboard/modem slot
NPU Options	None

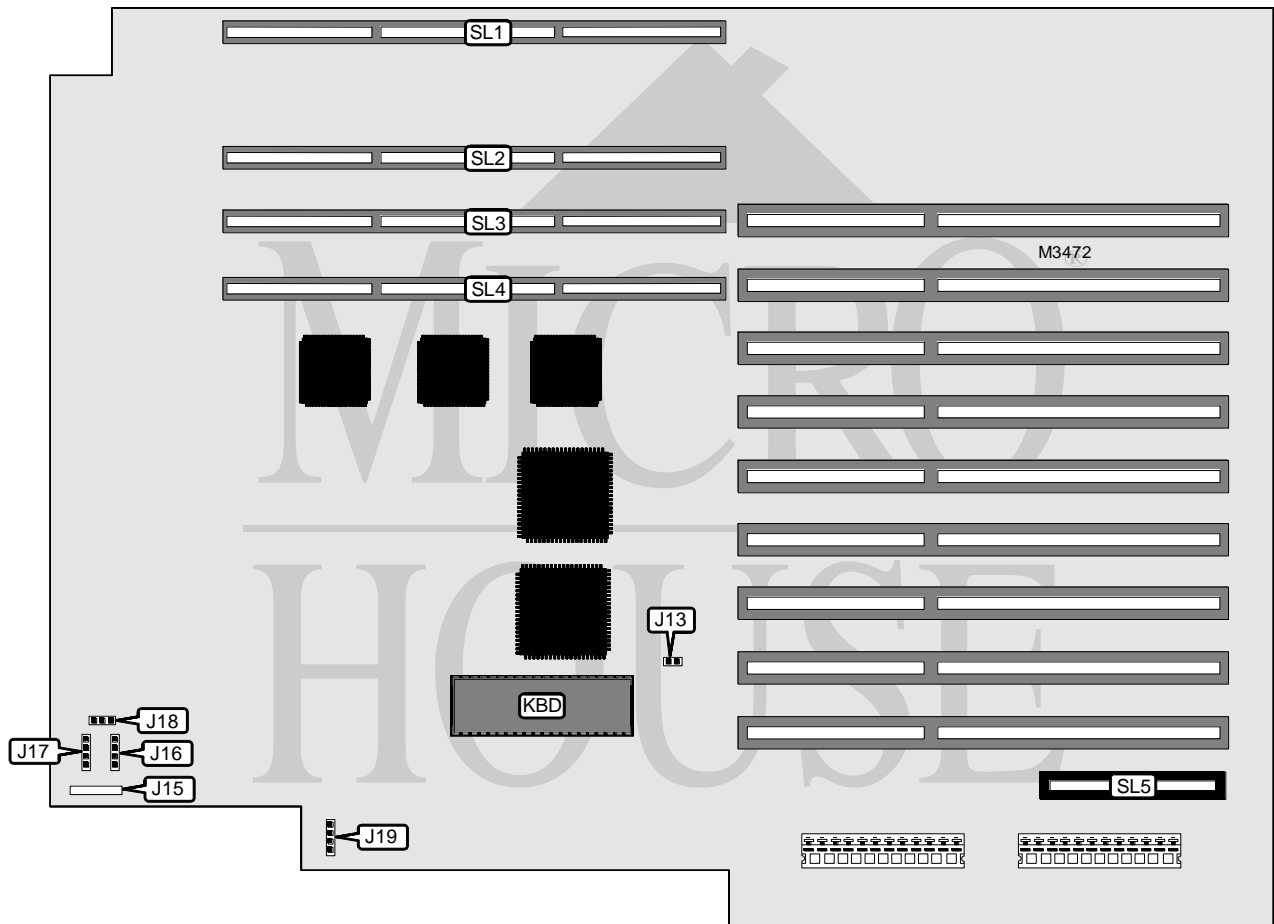


Continued on next page. . .

WYSE TECHNOLOGY, INC.
 WYSE SERIES 7000I MODEL 740MP

... continued from previous page


CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel connector	J15	IDE interface LED	J19
Speaker	J16	External memory card	SL1
External battery	J17	CPU/memory slots	SL2 - SL4
Chassis fan power	J18	Keyboard/modem adapter board	SL5

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J13	Open

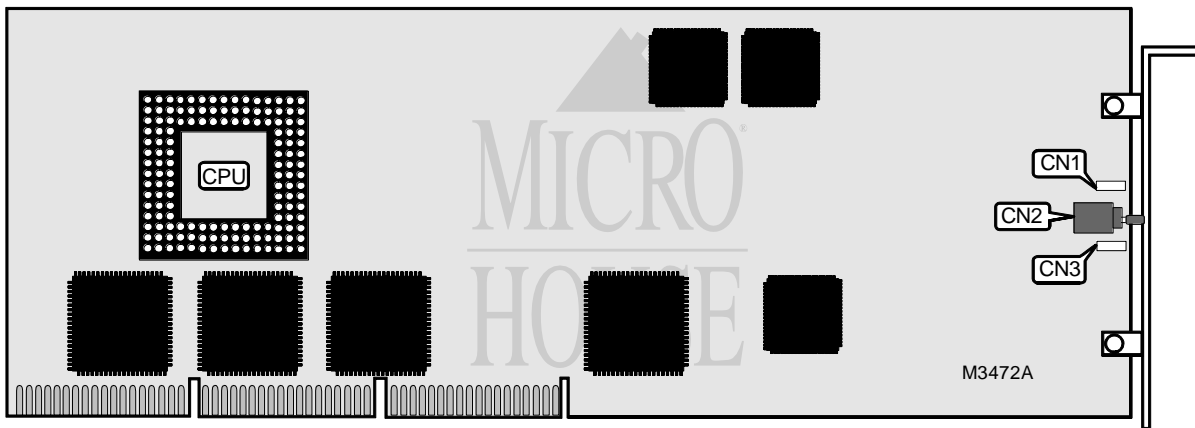

CPU BOARD

CONNECTIONS			
Purpose	Location	Purpose	Location
ERR LED	CN1	BUSY LED	CN3
NMI switch	CN2		

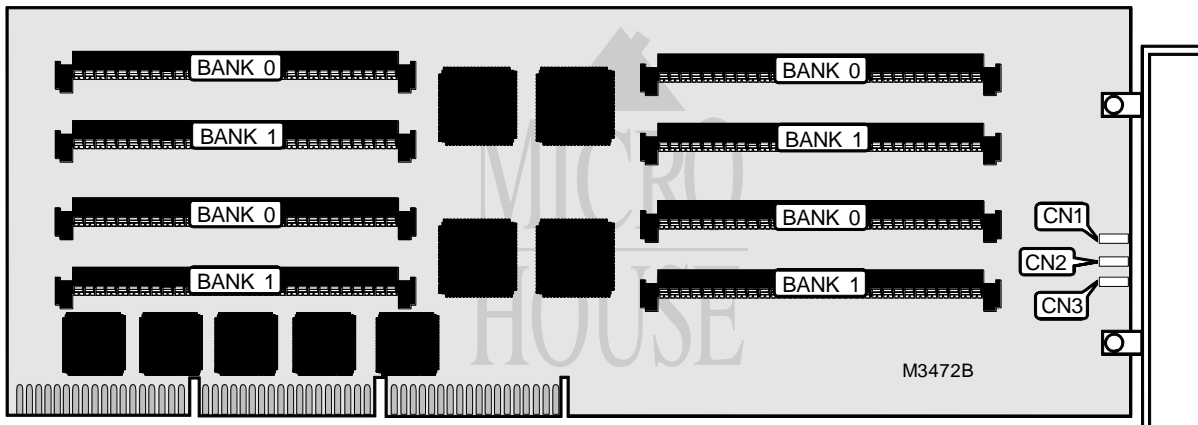

MRYP MEMORY CARD

Continued on next page...


WYSE TECHNOLOGY, INC.

WYSE SERIES 7000I MODEL 740MP

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ERR LED	CN1	BUSY LED	CN3
RST LED	CN2		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(4) 256K x 36	(4) 256K x 36
16MB	(4) 512K x 36	(4) 512K x 36
32MB	(4) 1M x 36	(4) 1M x 36
64MB	(4) 2M x 36	(4) 2M x 36
128MB	(4) 4M x 36	(4) 4M x 36
256MB	(4) 8M x 36	(4) 8M x 36

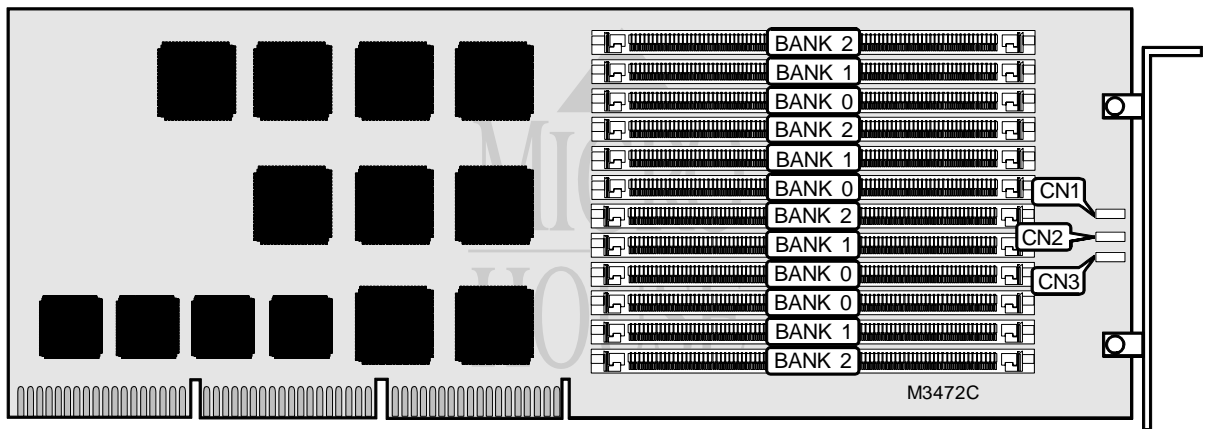

MRYE MEMORY CARD

CONNECTIONS			
Purpose	Location	Purpose	Location
ERR LED	CN1	BUSY LED	CN3
RST LED	CN2		

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
12MB	(4) 256K x 36	(4) 256K x 36	(4) 256K x 36
24MB	(4) 512K x 36	(4) 512K x 36	(4) 512K x 36
48MB	(4) 1M x 36	(4) 1M x 36	(4) 1M x 36
96MB	(4) 2M x 36	(4) 2M x 36	(4) 2M x 36
192MB	(4) 4M x 36	(4) 4M x 36	(4) 4M x 36
384MB	(4) 8M x 36	(4) 8M x 36	(4) 8M x 36