


MANDAX COMPUTER, INC.

MANDAX - 286

Processor	80286
Processor Speed	6/8/10/12MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

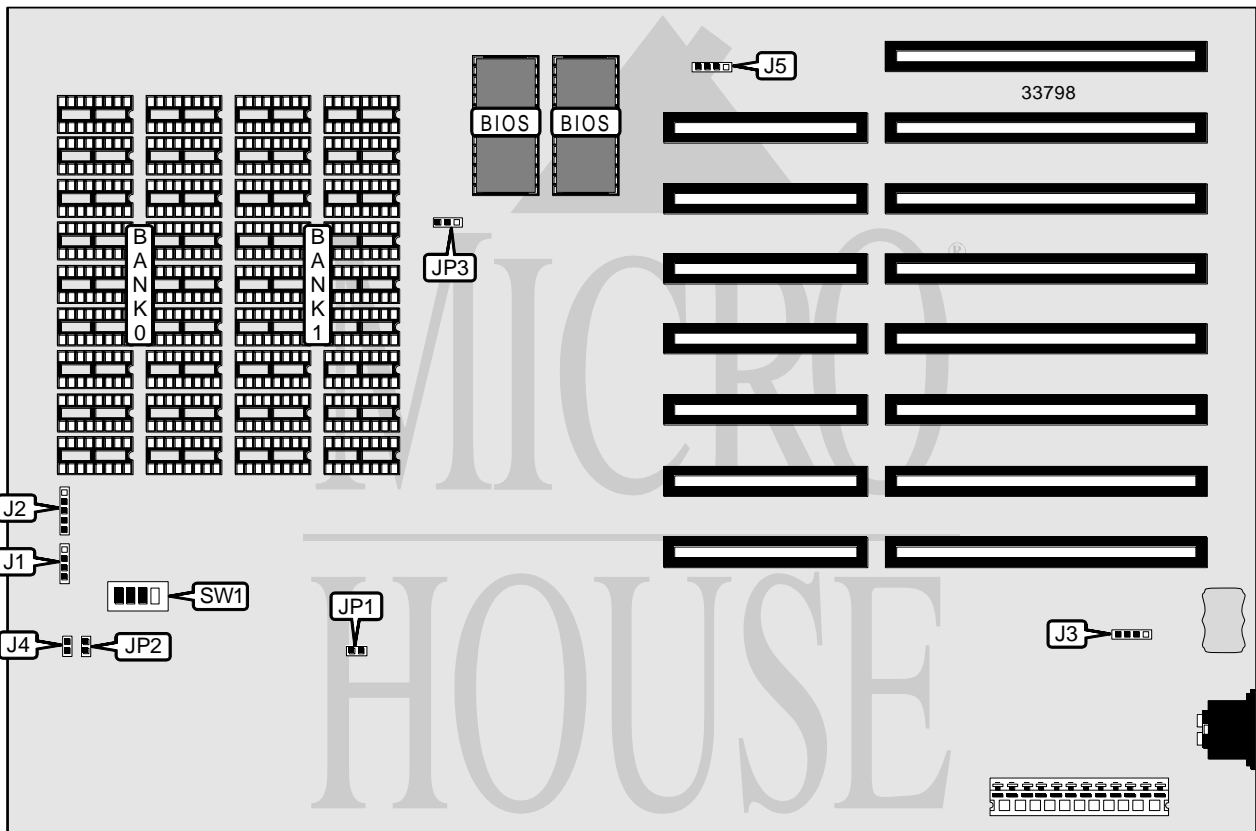

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Panel display connector	J5
Power LED & keylock	J2	Turbo LED	JP1
External battery	J3	Turbo switch	JP2
Reset switch	J4		

Continued on next page. . .

MANDAX COMPUTER, INC.

MANDAX - 286

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
BIOS type select 27128	JP3	Pins 1 & 2 closed
BIOS type select 27256	JP3	Pins 2 & 3 closed
Monitor type select color	SW1/3	On
Monitor type select monochrome	SW1/3	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(18) 4164	(18) 4164
512KB	(18) 41256	None
640KB	(18) 41256	(18) 4164
1MB (512KB/512KB)	(18) 41256	(18) 41256
1MB (640KB/384KB)	(18) 41256	(18) 41256

DRAM SWITCH CONFIGURATION			
Size	SW1/1	SW1/2	SW1/4
256KB	On	On	Off
512KB	Off	On	Off
640KB	On	Off	Off
1MB (512KB/512KB)	Off	Off	Off
1MB (640KB/384KB)	On	Off	On