DIGITAL EQUIPMENT CORPORATION P3360 P91X5 CE


Processor 80386
Processor Speed 25MHz
Chip Set Unidentified
Video Chip Set None

Maximum Onboard Memory 16MB (8MB on external memory card)

Maximum Video MemoryNoneCache64KBBIOSUnidentifiedDimensions350mm x 300mm

I/O Options 32-bit slots (2), parallel port, serial ports (2)

NPU Options 80387

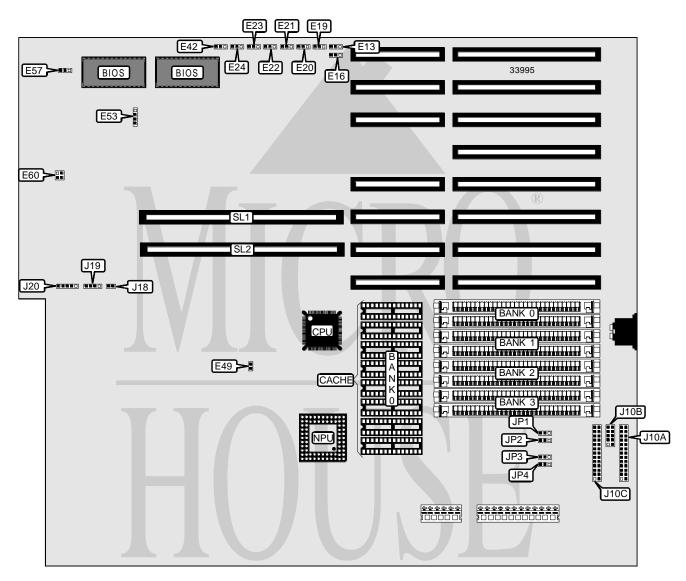

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION P3360 P91X5 CE

. . . continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J10A	Speaker	J19
Serial port	J10B	Power LED & keylock	J20
Serial port	J10C	32-bit slots	SL1 & SL2
Reset switch	J18		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Parallel port 278 disabled	E13	Pins 2 & 3 closed
Parallel port 278 enabled	E13	Pins 1 & 2 closed
í Printer acknowledge select trailing edge	E16	Pins 2 & 3 closed
Printer acknowledge select leading edge	E16	Pins 1 & 2 closed
í Parallel port 378 enabled	E19	Pins 1 & 2 closed
Parallel port 378 disabled	E19	Pins 2 & 3 closed
í Serial port 3F8 enabled	E20	Pins 1 & 2 closed
Serial port 3F8 disabled	E20	Pins 2 & 3 closed
í Serial port 2F8 enabled	E21	Pins 1 & 2 closed
Serial port 2F8 disabled	E21	Pins 2 & 3 closed
NPU not installed	E22	Pins 2 & 3 closed
NPU installed	E22	Pins 1 & 2 closed
í Keyboard reset disabled	E23	Pins 2 & 3 closed
Keyboard reset enabled	E23	Pins 1 & 2 closed
Unix mode enabled	E24	Pins 1 & 2 closed
Unix mode disabled	E24	Pins 2 & 3 closed
í Monitor type select color	E42	Pins 2 & 3 closed
Monitor type select monochrome	E42	Pins 1 & 2 closed
í Factory configured - do not alter	E49	Closed
í BIOS type select 2764	E57	Pins 1 & 2 closed
BIOS type select 27128	E57	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(2) 1M x 9			

DRAM JUMPER CONFIGURATION		
Size	E60	
1MB	Open	
2MB	Pins 3 & 4 closed	
4MB	Pins 1 & 2 closed	
8MB	Pins 1 & 2, 3 & 4 closed	

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION P3360 P91X5 CE

. . . continued from previous page

	DRAM SIZE SELECTION	
Size	JP3	JP4
256K x 9	Pins 1 & 2 closed	Pins 1 & 2 closed
1M x 9	Pins 2 & 3 closed	Pins 2 & 3 closed

	DRAM SPEED SELECTION	
Speed	JP1	JP2
100ns	Pins 1 & 2 closed	Pins 1 & 2 closed
120ns	Pins 2 & 3 closed	Pins 2 & 3 closed

SIMM TYPE CONFIGURATION		
Туре	E53	
Static column	Pins 3 & 4 closed	
Do not strap	Pins 1 & 2 closed	
Standard RAS/CAS	Open	
Fast page mode	Pins 1 & 2, 3 & 4 closed	

CACHE CONFIGURATION		
Size	Bank 0	
64KB	(8) 8K x 8	