


UNIDENTIFIED ALI 386DX

| | |
|-------------------------------|-----------------|
| Processor | 80386DX |
| Processor Speed | 25/33/40MHz |
| Chip Set | ALI |
| Video Chip Set | None |
| Maximum Onboard Memory | 64MB |
| Maximum Video Memory | None |
| Cache | 32/128KB |
| BIOS | Unidentified |
| Dimensions | 220mm x 170mm |
| I/O Options | None |
| NPU Options | 80387DX/CX87DLC |

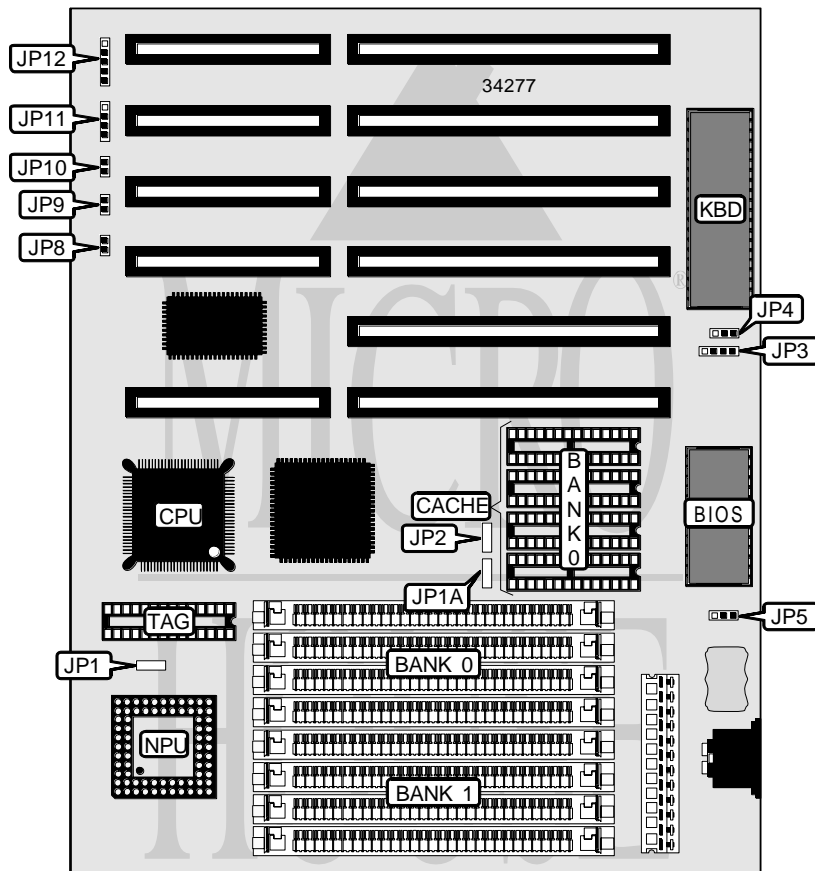

| CONNECTIONS | | | |
|------------------|----------|---------------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | JP3 | Reset switch | JP10 |
| Turbo switch | JP8 | Speaker | JP11 |
| Turbo LED | JP9 | Power LED & keylock | JP12 |

Continued on next page. . .

UNIDENTIFIED
ALI 386DX

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|-------|-------------------|
| Function | Label | Position |
| í Factory configured - do not alter | JP1 | Unidentified |
| í Factory configured - do not alter | JP1A | Unidentified |
| í Factory configured - do not alter | JP2 | Unidentified |
| Monitor type select color | JP4 | Pins 2 & 3 closed |
| Monitor type select monochrome | JP4 | Pins 1 & 2 closed |
| í CMOS memory normal operation | JP5 | Pins 2 & 3 closed |
| CMOS memory clear | JP5 | Pins 1 & 2 closed |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256K x 9 | None |
| 2MB | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | None |
| 5MB | (4) 256K x 9 | (4) 1M x 9 |
| 8MB | (4) 1M x 9 | (4) 1M x 9 |
| 16MB | (4) 4M x 9 | None |
| 20MB | (4) 1M x 9 | (4) 4M x 9 |
| 32MB | (4) 4M x 9 | (4) 4M x 9 |
| 64MB | (4) 16M x 9 | None |

| CACHE CONFIGURATION | | |
|---------------------|-------------|--------------|
| Size | Bank 0 | TAG |
| 32KB | (4) 8K x 8 | Unidentified |
| 128KB | (4) 32K x 8 | Unidentified |