## **NCR CORPORATION**

## MODEL 3278-XXXX PC710/3392

**Processor** 80286 (exact location unidentified)

Processor Speed 6/10MHz

Chip Set Unidentified

Video Chip Set None

**Maximum Onboard** 

Memory

640KB (on mainboard), (16MB on external memory card)

Maximum Video Memory None


Cache None

**BIOS** Unidentified

**Dimensions** Unidentified

I/O Options Expansion slot

NPU Options 80287 (exact location unidentified)

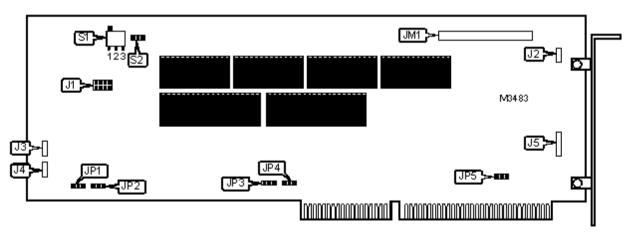

Purpose	Location	Purpose	Location
External battery	J2	Auxiliary keyboard connector	J5
Keylock	J3	Expansion slot	JM1
Volume control	J4		

## USER CONFIGURABLE SETTINGS

	Function	Label	Position
»	BIOS type select 32KB	J1	Pins 3 & 6, 4 & 5 closed
	BIOS type select 16KB	J1	Pins 1 & 8, 2 & 7 closed
»	Wait state select 1 wait state	JP1	Pins 1 & 2 closed
	Wait state select 0 wait states	JP1	Pins 2 & 3 closed
»	10MHz CPU speed enabled	JP2	Pins 1 & 2 closed
	10MHz CPU speed disabled	JP2	Pins 2 & 3 closed
»	Memory expansion card installed	JP5	Pins 1 & 2 closed
	Memory expansion card not installed	JP5	Pins 2 & 3 closed
	Monitor type select graphics display	S1	Left

	Monitor type select alphanumeric display	S1	Right
»	Power on speed select 10MHz	S2	Pins 1 & 2 closed
	Power on speed select 6MHz	S2	Pins 2 & 3 closed

## DRAM CONFIGURATION

Note: The location of the memory is unidentified. Board accepts 256KB or 512KB memory.

DRAM JUMPER CONFIGURATION		
Size	JP3	
256KB	Pins 2 & 3 closed	
512KB	Pins 1 & 2 closed	

DRAM JUMPER CONFIGURATION		
Setting	JP4	
All onboard memory enabled	Pins 1 & 2 closed	
All onboard memory disabled	Pins 2 & 3 closed	