HAUPPAUGE COMPUTER WORKS, INC.


386 XT20-02/AT20-02

Processor 80386DX **Processor Speed** 20MHz **Chip Set** C & T Max. Onboard DRAM 4MB Cache None **BIOS** Award

Dimensions 330mm x 218mm

I/O Options 32-bit external memory card slot

NPU Options 80387

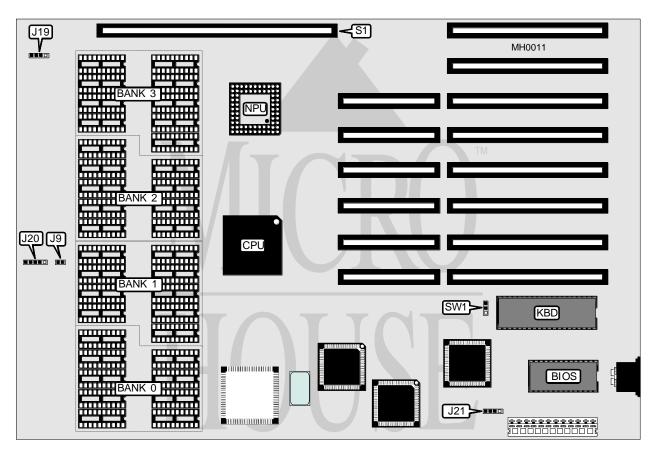

| CONNECTIONS | | | | | | |
|---------------------|----------|-----------------------------|----------|--|--|--|
| Purpose | Location | Purpose | Location | | | |
| Reset switch | J9 | External battery | J21 | | | |
| Speaker | J19 | 32-bit external memory card | S1 | | | |
| Power LED & keylock | J20 | | | | | |

Continued on next page . . .

HAUPPAUGE COMPUTER WORKS, INC. 386 XT20-02/AT20-02

 \dots continued from previous page

| USER CONFIGURABLE SETTINGS | | | | | |
|--------------------------------|--------|-------------------|--|--|--|
| Function | Jumper | Position | | | |
| í Monitor type select color | SW1 | pins 2 & 3 closed | | | |
| Monitor type select monochrome | SW1 | Open | | | |

| DRAM CONFIGURATION | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|--|--|
| Size | Bank 0 | Bank 1 | Bank 2 | Bank 3 | | |
| 1MB | (9) 44256 | NONE | NONE | NONE | | |
| 2MB | (9) 44256 | (9) 44256 | NONE | NONE | | |
| 3MB | (9) 44256 | (9) 44256 | (9) 44256 | NONE | | |
| 4MB | (9) 44256 | (9) 44256 | (9) 44256 | (9) 44256 | | |