ARTEK COMPUTER SYSTEMS, INC.


OPTI-25

Processor 80386DX **Processor Speed** 25MHz **Chip Set** OPTI Max. Onboard DRAM 8MB Cache None **BIOS** AMI

Dimensions 330mm x 218mm

I/O Options 32-bit external memory card slot

NPU Options 80387/3167

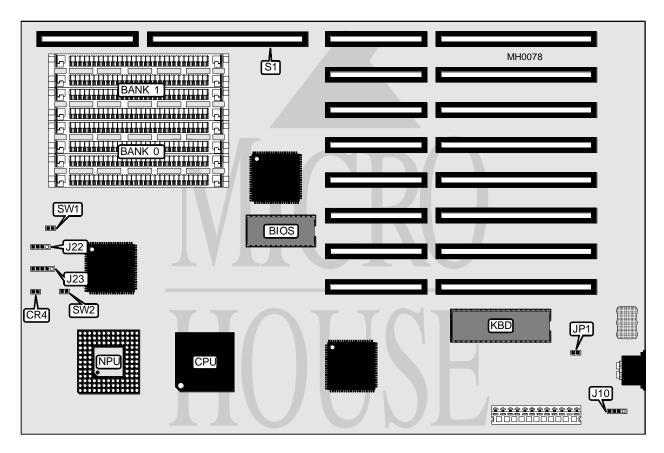

CONNECTIONS				
Purpose	Location	Purpose	Location	
Turbo LED	CR4	32-bit external memory card	S1	
External battery	J10	Reset switch	SW1	
Speaker	J22	Turbo switch	SW2	
Power LED & keylock	J23			

Continued on next page . . .

ARTEK COMPUTER SYSTEMS, INC. OPTI-25

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select monochrome	JP1	Open		
Monitor type select color	JP1	Closed		
í CMOS memory normal operation	JP10	pins 2 & 3 closed		
CMOS memory clear	JP10	pins 3 & 4 closed		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
1MB	(4) 256K x 9	NONE		
2MB	(4) 256K x 9	(4) 256K x 9		
4MB	(4) 1M x 9	NONE		
5MB	(4) 256K x 9	(4) 1M x 9		
8MB	(4) 1M x 9	(4) 1M x 9		