


**EVEREX SYSTEMS, INC.**  
**1800R 286/8 (EV-1800)**

**Processor** 80286  
**Processor Speed** 8/10/12/16/20MHz  
**Chip Set** Suntac  
**Max. Onboard DRAM** 1MB  
**Cache** None  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** None  
**NPU Options** 80287

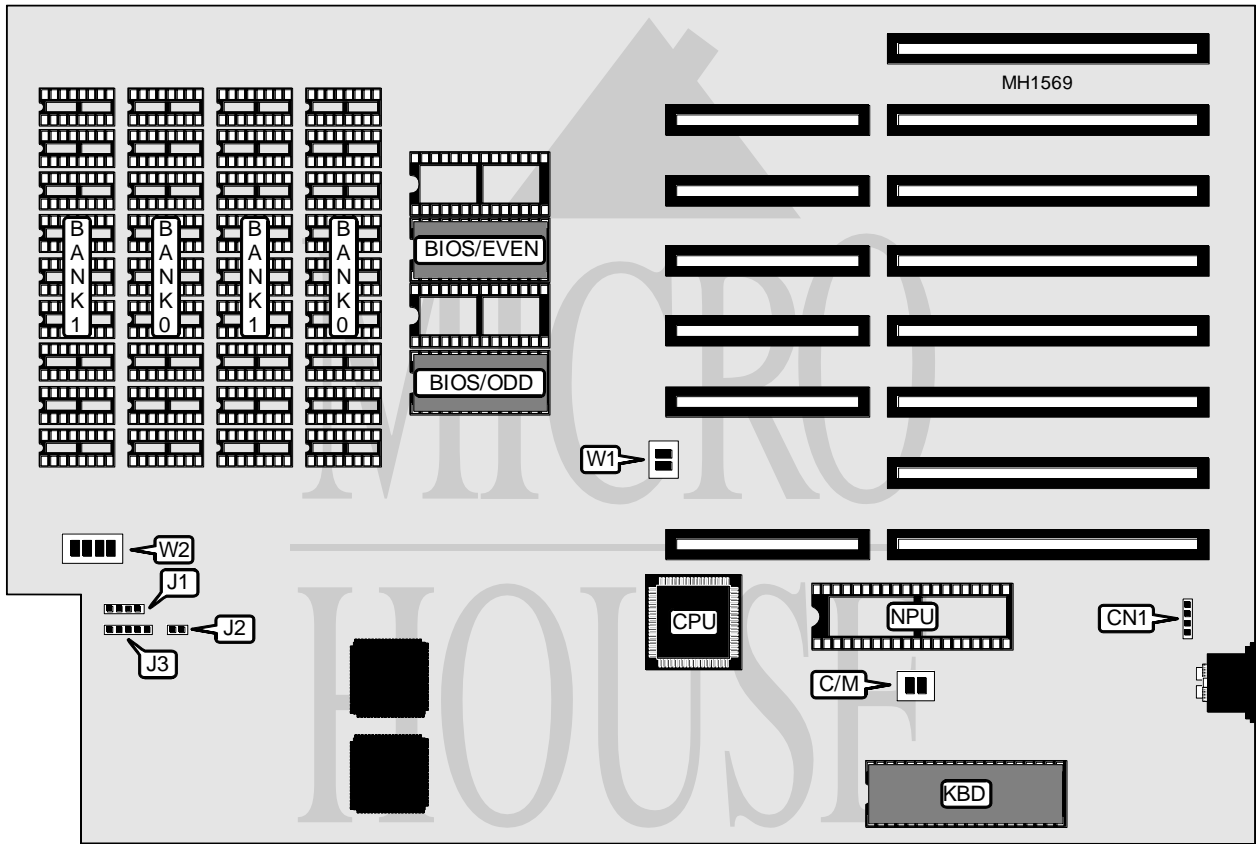

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CN1	Speaker	J2
Reset switch	J1	Power LED & keylock	J3

*Continued on next page . . .*

## EVEREX SYSTEMS, INC.

## 1800R 286/8 (EV-1800)

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Switch	Position
í Monitor type select color	C/M	On
Monitor type select monochrome	C/M	Off

## DRAM CONFIGURATION

Size	Bank 0	Bank 1	W1/switch 1	W1/switch 2
256KB	(18) 4464	(18) 4464	On	On
512KB	(18) 41256	NONE	On	Off
640KB	(18) 41256	(18) 4464	Off	On
1MB	(18) 41256	(18) 41256	Off	Off

## BIOS TYPE CONFIGURATION

BIOS type	W2/switch 1	W2/switch 2	W2/switch 3	W2/switch 4
27128	On	On	Off	Off
27256	Off	Off	On	On