
JOINDATA SYSTEMS, INC. G 3 8 6 B V E R S I O N 2

Processor	80386DX	
Processor Speed	20/25MHz	
Chip Set	UMC	
Max. onboard DRAM	16MB	
Cache	None	
BIOS	AMI	
Dimensions	330mm x 218mm	
I/O Options	32-bit external memory card	
NPU Options	80287/80387DX	

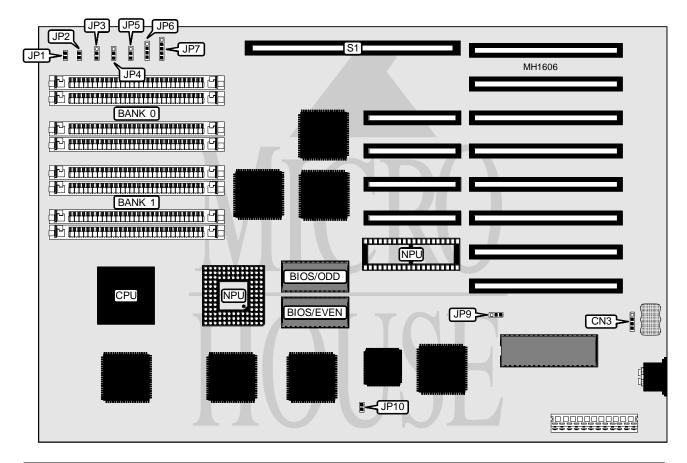

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP2	Speaker	JP6
Turbo LED	JP1	Power LED & keylock	JP7
Turbo switch	JP3	32-bit external memory card	S1
Unknown	JP4		

Continued on next page . . .


JOINDATA SYSTEMS, INC. G 3 8 6 B V E R S I O N 2

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Position			
í Monitor type select color	W11	Closed		
Monitor type select monochrome	W11	Open		

		DRAM CONFIGURATION	Ν	
Size	Bank 0	Bank 1	Bank 2	Bank 3
2MB	(36) 41256	(36) 41256	NONE	NONE
8MB	(36) 411000	(36) 411000	NONE	NONE
16MB	(36) 411000	(36) 411000	(36) 411000	(36) 411000
Note: Banks 2 and 3 are located on the external memory card.				

NPU CONFIGURATION				
NPU JP9 JP10				
80287	pins 2 & 3 closed	Open		
80387	pins 1 & 2 closed	Closed		
Not installed	Open	Open		

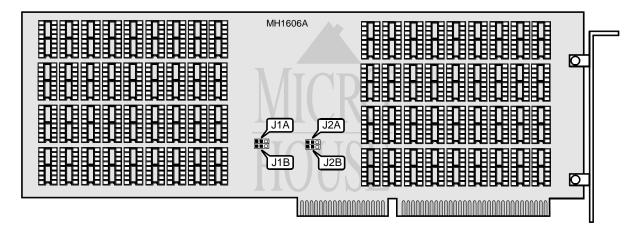

DRAM JUMPER CONFIGURATION				
System Memory J1A J1B J2A J2B				
ОКВ	pins 1 & 2 closed			
2MB	pins 2 & 3 closed			
8MB	pins 2 & 3 closed			