


LEADING EDGE PRODUCTS, INC. WINPRO 486

Processor	CX486SLC
Processor Speed	25/33/40MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB
Cache	16/64KB
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

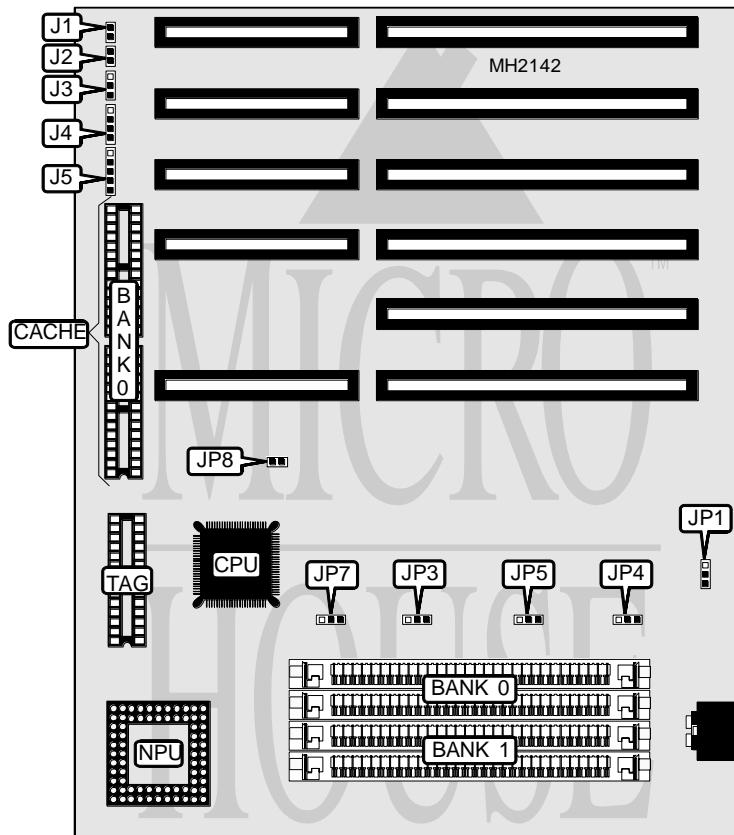

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J1	Speaker	J4
Turbo switch	J2	Power LED & keylock	J5
Turbo LED	J3		

Continued on next page. . .

LEADING EDGE PRODUCTS, INC.
WINPRO 486

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	pins 1 & 2 closed
Monitor type select color	JP1	pins 2 & 3 closed
í Factory configured - do not alter	JP4	Open
í Factory configured - do not alter	JP5	Open
í Factory configured - do not alter	JP7	Open
í Internal cache enabled	JP8	Closed
Internal cache disabled	JP8	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
16KB	(1) 8K x 8	(1) 8K x 8	(1) 8K x 8
64KB	(1) 32K x 8	(1) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION	
Size	JP3
16KB	pins 2 & 3 closed
64KB	pins 1 & 2 closed