


# ELITEGROUP COMPUTER SYSTEMS, INC.

## 2 8 6 B

<b>Processor</b>	80286
<b>Processor Speed</b>	12/16MHz
<b>Chip Set</b>	C & T
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	4MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	221mm x 221mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

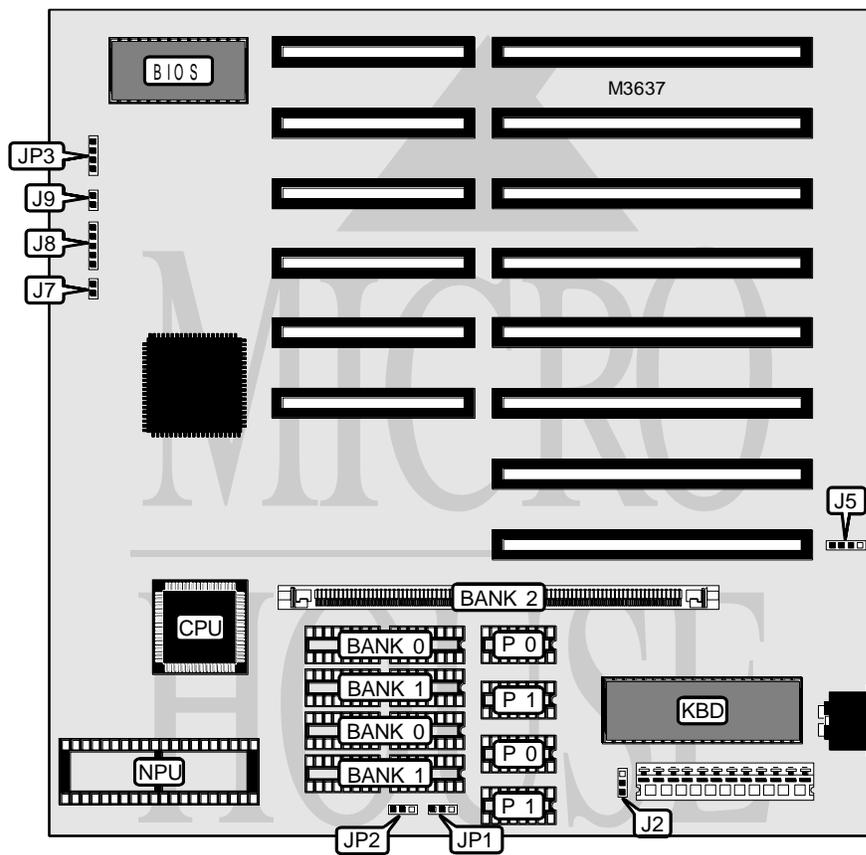

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J5	Turbo LED	J9
Reset switch	J7	Speaker	JP3
Power LED & keylock	J8		

*Continued on next page...*

**ELITEGROUP COMPUTER SYSTEMS, INC.**  
**2 8 6 B**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	J2	Pins 2 & 3 closed
Monitor type select monochrome	J2	Pins 1 & 2 closed

DRAM CONFIGURATION					
Size	Bank 0	P 0	Bank 1	P 1	Bank 2
512KB	(4) 44256	(2) 41256	None	None	None
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	None
1MB	None	None	None	None	(1) 256K x 36
2MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(1) 256K x 36
4MB	None	None	None	None	(1) 1M x 36

DRAM JUMPER CONFIGURATION		
Type	JP1	JP2
DIP & SIMM memory installed	Pins 2 & 3 closed	Pins 2 & 3 closed
SIMM memory only installed	Pins 1 & 2 closed	Pins 1 & 2 closed