
## DIGITAL EQUIPMENT CORPORATION PRIORIS HX

Unidentified **Processor Processor Speed** Unidentified Unidentified **Chip Set Video Chip Set** Unidentified **Maximum Onboard Memory** 512MB **Maximum Video Memory** Unidentified Cache Unidentified **BIOS** Unidentified **Dimensions** 355mm x 304mm

I/O Options 32-bit PCI slots (6), floppy drive interface, parallel port, PS/2 mouse port, serial

ports (2), VGA port, CPU card slot, memory slot

NPU Options None

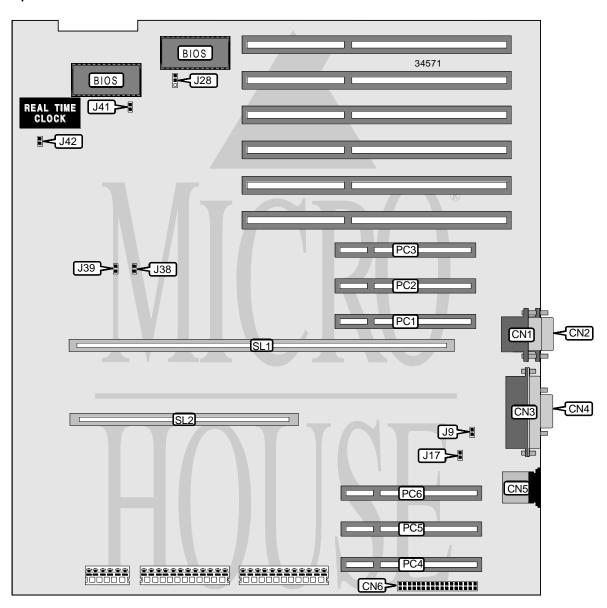

## DIGITAL EQUIPMENT CORPORATION PRIORIS HX

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
Serial port	CN1	Floppy drive interface	CN6	
Serial port	CN2	32-bit PCI slots	PC1 - PC6	
Parallel port	CN3	CPU card slot	SL1	
VGA port	CN4	Memory card slot	SL2	
PS/2 mouse port	CN5			

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í VGA IRQ disabled	J9	Open	
VGA IRQ enabled	J9	Closed	
í On board video enabled	J17	Closed	
On board video disabled	J17	Open	
í Boot block update enabled	J28	Pins 1 & 2 closed	
Boot block update disabled	J28	Pins 2 & 3 closed	
í Password normal operation	J38	Open	
Password clear	J38	Closed	
í Flash BIOS normal operation	J39	Open	
Flash BIOS recovery mode	J39	Closed	
í BIOS upgrade enabled	J41	Closed	
BIOS upgrade disabled	J41	Open	
í Digital Remote Server Management not installed	J42	Closed	
Digital Remote Server Management installed	J42	Open	

Note: Board accepts up to 512MB of memory. The configuration is unidentified.

## CACHE CONFIGURATION

Note: The location and size of the cache is unidentified.

## VIDEO MEMORY CONFIGURATION

Note: The location and size of the video memory is unidentified.